




Attaching Casters to Your System

To attach the caster bracket assemblies to your system, perform the following steps:

- 1 Turn off the system and any attached peripherals, disconnect them from their electrical outlets, and then disconnect all peripherals from the system.
- 2 Gently turn the system upside down.
- 3 Remove the four rubber feet from the bottom of the chassis (see Figure 1-1).
Each rubber foot is attached to the bottom of the chassis by a plastic screw.

Figure 1-1. Removing the Feet

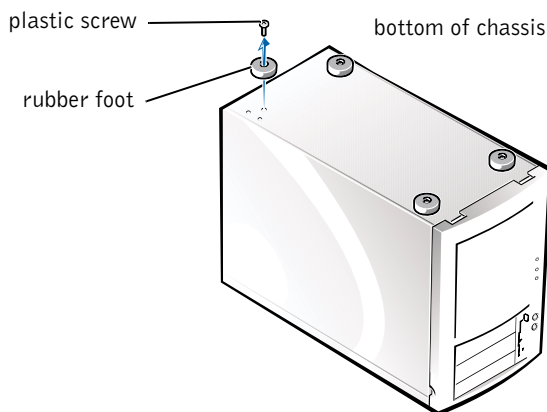


- 4 Attach one caster bracket assembly toward the front of the chassis and one toward the back of the chassis (see Figure 1-2).

Use four metal screws to attach each caster bracket assembly.



Figure 1-2. Attaching the Casters

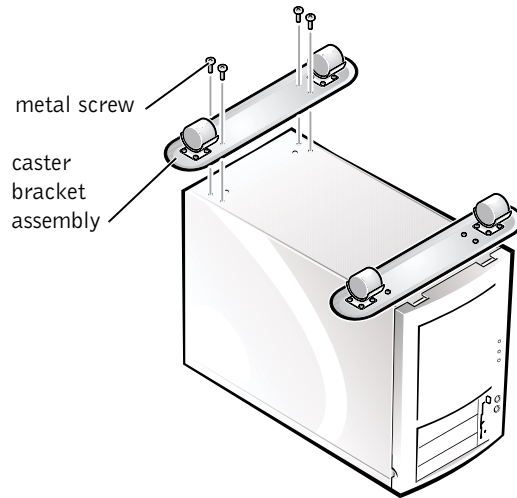

Information in this document is subject to change without notice.
© 2001 Dell Computer Corporation. All rights reserved. Printed in the U.S.A.

Reproduction in any manner whatsoever without the written permission of Dell Computer Corporation is strictly forbidden.

Trademarks used in this text: *Dell* and the *DELL* logo are trademarks of Dell Computer Corporation. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Dell Computer Corporation disclaims any proprietary interest in trademarks and trade names other than its own.